

A protection system for medium-voltage potential transformers

The subject of the invention is a protection system for medium-voltage potential transformers, finding application in the attenuation of ferroresonant states occurring in at
5 least one of three potential transformers in a three-phase medium-voltage network.

For the attenuation of ferroresonant states in electrical equipment, and especially in potential transformers, a protecting resistor of a resistance of several dozen ohms is typically used. Such a resistor is connected to three auxiliary secondary windings of
10 three single-phase transformers forming an open delta system. Though this solution employs a simple design, it has significant disadvantages. In case of sustained unbalance in the supply network, the small resistance value of the protecting resistor, which is required for the effectiveness of ferroresonant oscillation attenuation, brings about the danger of thermal damage to the transformer or the resistor itself. In practice,
15 attenuating resistors of powers of several hundred watts and of large dimensions are used.

PTC resistors, bimetallic circuit breakers or thermal fuses are commonly used to protect electrical equipment against thermal damage caused, for example, by voltage overload.

20 For example, a module protecting a telecommunication system, which consists of a PTC thermistor connected in series into the subscriber's line winding and a thyristor diode which is connected in parallel between the subscriber's line winding and ground is known from a German patent application No. 3621200. If undesired voltage appears in the subscriber's line, then current flowing through the thyristor diode heats it up and
25 consequently the thermistor is heated up as well, because the diode is thermally

connected with the PTC thermistor. As a result, the thermistor resistance increases and the voltage overload is reduced.

The essence of the medium-voltage potential transformer protection system comprising an attenuating resistor connected into the open delta system of three auxiliary secondary windings of three single-phase transformers is that an element having a threshold voltage and current characteristic and a thermal fuse are connected in series between the attenuating resistor and the output of the auxiliary secondary winding of one of the single-phase transformers.

Preferably the thermal fuse has the form of a bimetallic circuit breaker, and the element with threshold voltage and current characteristic has the form of two Zener diodes push-pull connected with one another.

As an alternative, the thermal fuse has the form of a PTC resistor, and the element with the threshold characteristic has the form of two Zener diodes push-pull connected with one another.

Preferably the thermal fuse is a PTC resistor, and the element with the threshold characteristic is a varistor.

As an alternative, the thermal fuse is a bimetallic circuit breaker, and the element with the threshold voltage and current characteristic is a varistor.

The advantage of the inventive system is that it assures the attenuation of ferroresonant oscillations while being insensitive to small values of zero-sequence voltage, which occur in case of small unbalance in a three-phase network. In case of sustained zero-sequence voltage, for instance one generated as a result of an earth fault of one of the phases, the use of a thermal fuse provides additional protection of the transformers and of the elements of the protection system that protects the transformers against damage. The use of the thermal protection allows to decrease the thermal power of the attenuating resistor compared to earlier solutions. That is why the inventive system is efficient and its dimensions are small compared to existing protecting devices.

The subject of the invention is presented in an embodiment in the drawing, where fig. 1 shows a system of potential transformers connected to a protecting system, fig. 2 – the first variant of the protecting system embodiment FDC1, fig. 3 – the second variant of the protecting system embodiment FDC2, fig. 4 – the third variant of the protecting

system embodiment FDC3, and fig. 5 – the fourth variant of the protecting system embodiment FDC4.

The auxiliary windings of three single-phase potential transformers VT1, VT2, VT3 are connected with one another to form an open delta arrangement. Primary windings A-N are directly connected with a three-phase network RST and earth. The terminals of the secondary windings a-n of the individual transformers are the working outputs of these transformers. The terminals of the auxiliary secondary windings da and dn of the transformers are connected with one another in such way that the terminal da of the auxiliary secondary winding of the transformer VT1 is connected with the input of the protection system FDC, whose output is connected with the terminal dn of the auxiliary secondary winding of the third transformer VT3, and whose terminal da is connected with the terminal dn of the auxiliary secondary winding of the second transformer VT2. Next, the terminal da of the second transformer VT2 is connected with the terminal dn of the first transformer VT1. During the device operation, between the terminal da of the first transformer VT1 and the terminal dn of the third transformer VT3 voltage U₀ appears, which is applied to the terminals of the protection system FDC.

The protecting system FDC comprises branches interconnected in parallel, and in the first FDC1 variant of the system embodiment, one branch contains: an attenuating resistor R1, two Zener diodes D1, D2 push-pull connected with one another and a bimetallic circuit breaker TF1, interconnected in series. Two push-pull connected Zener diodes can be substituted with one bi-directional Zener diode, which is not shown in the drawing. The other branch of the system contains a resistor R2.

In the second FDC2 variant of the system embodiment, one branch contains: resistor R1, two Zener diodes D1,D2 push-pull connected with one another and a PTC resistor, interconnected in series. The two push-pull connected Zener diodes can be substituted with one bi-directional Zener diode, which is not shown in the drawing. The other branch of the system contains a resistor R2.

In the third FDC3 variant of the system embodiment, one branch contains: a resistor R1, a varistor and a PTC resistor, interconnected in series. The other branch of the system contains a resistor R2.

In the fourth FDC4 variant of the system embodiment, one branch contains: resistor R1, a varistor and a bimetallic circuit breaker TF1, interconnected in series. The other branch of the system contains a resistor R2.

In all variants of the invention embodiment the resistor R2 has a value considerably larger than the resistance from the resistor R1.

The operation of the inventive system is as follows:

5 In case of full balance in a three-phase network, the zero-sequence voltage \underline{U}_0 has a value = 0 and no current flows through the protection system FDC.

In case of insignificant unbalance in the three-phase network, voltage \underline{U}_0 has a non-zero value, but less than the value of the threshold voltage of the element with a threshold voltage and current characteristic. In such case, current of a value of $\underline{U}_0/\underline{R2}$ flows
10 through the protection system FDC. Since the resistance of the resistor R2 has a large value ($\underline{R2} \gg \underline{R1}$), current flowing through the protection system FDC has a small value. Therefore, also the thermal power emitted in the protection system FDC is in such case insignificant. For example: if R2 has a value of 200 Ohm, then if the value $\underline{U}_0=10V$, the thermal power emitted in the system FDC has a value of 0.5W.

15 In the event that a ferroresonant state occurs in the three-phase network, voltage \underline{U}_0 has a value exceeding the threshold value of the element with threshold voltage and current characteristic. In that case, current flows through the resistor R1. Due to a small value of the resistor R1 a very rapid attenuation of ferroresonant oscillations occurs. Since the branch with the resistor R1 works for a short time, thermal energy emitted in
20 this branch has an insignificant value. Therefore neither the branch elements overheat nor the thermal fuse is actuated.

In the event that a considerable sustained unbalance in a three-phase network occurs, which may be caused, for instance, by an earth fault of one of the phase conductors, voltage \underline{U}_0 has also a value bigger than the threshold voltage of the
25 element with threshold voltage and current characteristic. Therefore a current of high intensity flows through the branch with the resistor R1. However, since such condition does not require the action of the attenuating resistor, the thermal fuse in the form of a bimetallic fuse or a PTC resistor causes a large increase in the resultant resistance of the branch that contains the resistor R1, or its complete disconnection. Then no current
30 flows through this branch, or low-intensity current flows through it. When the cause of the unbalance disappears and the thermal fuse cools down, the system will reset.

5

Claims

1. A protecting system for medium-voltage potential transformers, comprising an
10 attenuating resistor connected into the open delta system of three auxiliary
secondary windings of three single-phase transformers, **characterised in that**
an element with a threshold voltage and current characteristic (1) and a thermal
fuse (2) are connected in series between an attenuating resistor (R1) and the
output of the auxiliary secondary winding of one of the single-phase
15 transformers.
2. A system according to claim 1, **characterised in that** the thermal fuse (2) has
the form of a bimetallic circuit breaker (TF1), and the element with a threshold
voltage and current characteristic has the form of two Zener diodes (D1, D2),
push-pull connected with one another.
- 20 3. A system according to claim 1, **characterised in that** the thermal fuse (2) has
the form of a PTC resistor, and the element with a threshold voltage and current
characteristic has the form of two Zener diodes push-pull connected with one
another.
4. A system according to claim 1, **characterised in that** the thermal fuse (2) is a
25 PTC resistor, and the element with a threshold voltage and current characteristic
is a varistor.
5. A system according to claim 1, **characterised in that** the thermal fuse (2) is a
bimetallic circuit breaker (TF1), and the element with a threshold voltage and
current characteristic is a varistor.

30





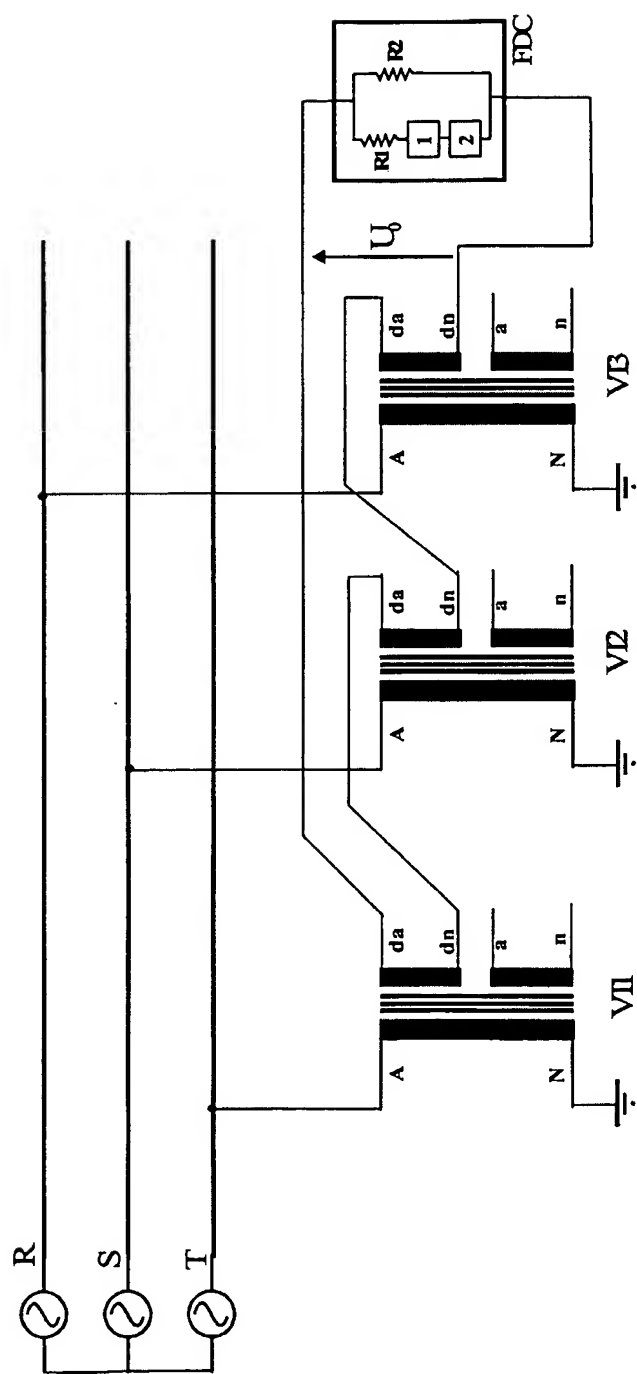


Fig. 1

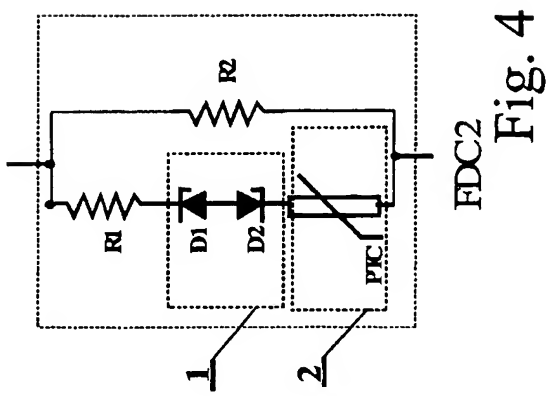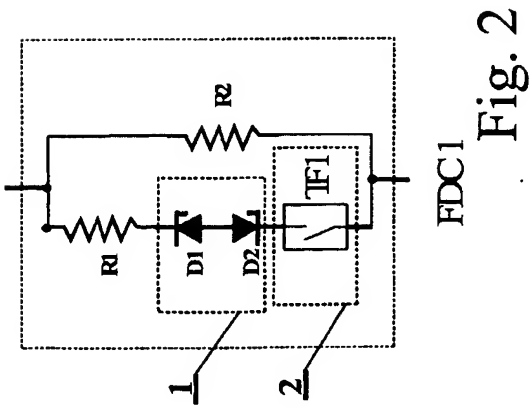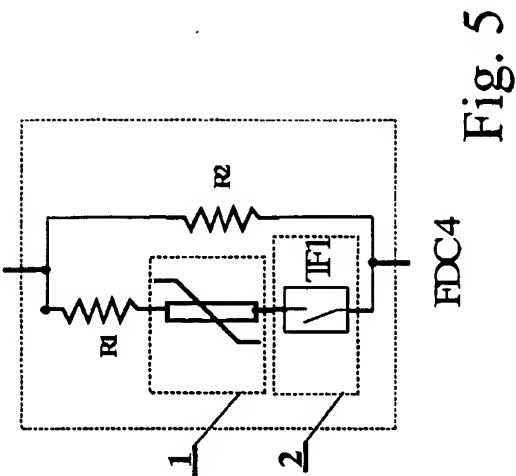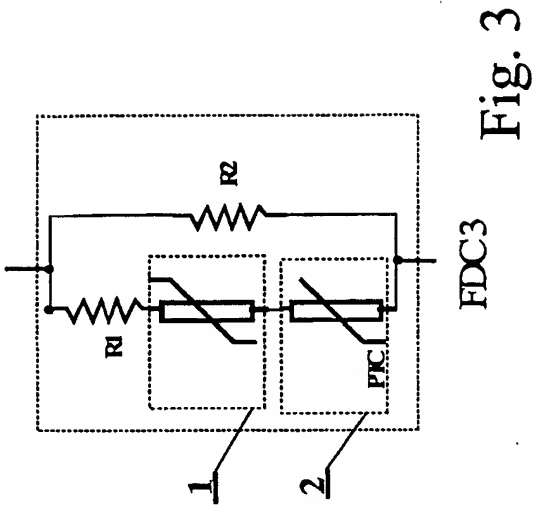

INTERNATIONAL SEARCH REPORT

International Application No
PCT/PL2004/000053

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H02H9/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 H02H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	DE 12 65 836 B (SIEMENS AG) 11 April 1968 (1968-04-11) column 3, line 54 - column 4, line 21; figure 1	1-5
Y	GB 1 150 865 A (MICA FIL AG) 7 May 1969 (1969-05-07) page 2, line 9 - line 28; figure 1 page 1, line 22 - line 31	1-5
A	DE 28 24 233 A (RITZ MESSWANDLER KG) 6 December 1979 (1979-12-06) page 2, paragraph IV; figure 1	5
A	DE 27 04 112 A (MICA FIL AG) 20 July 1978 (1978-07-20) page 9, paragraph II - page 10, paragraph I; figure 2	1

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

4 November 2004

Date of mailing of the international search report

17/11/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Colombo, A

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No
PCT/PL2004/000053

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
DE 1265836	B	11-04-1968	CH	440445 A	31-07-1967
GB 1150865	A	07-05-1969	BE	710262 A	17-06-1968
			CH	474175 A	15-06-1969
			ES	350010 A1	16-04-1970
			FR	1566342 A	09-05-1969
			NL	6801636 A	07-08-1968
DE 2824233	A	06-12-1979	DE	2824233 A1	06-12-1979
DE 2704112	A	20-07-1978	CH	604349 A5	15-09-1978
			DE	2704112 A1	20-07-1978